



**DUCAST**

DUBAI. UAE.
info@ducast.com
www.ducast.com

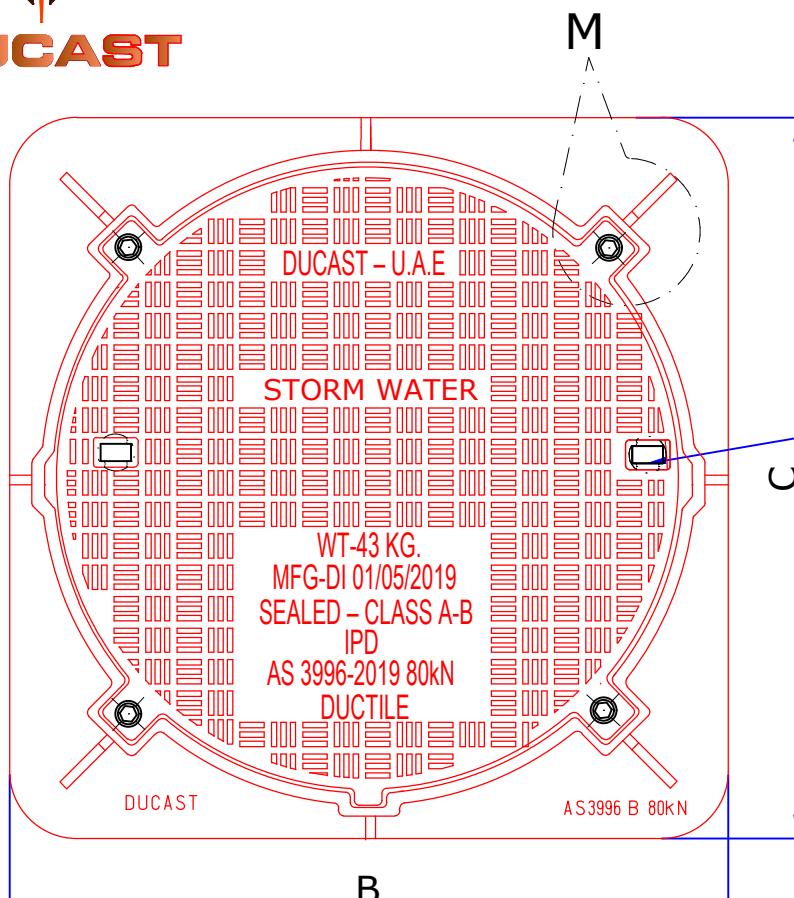


Plastic caps on the
lifting key hole.

M-10 316 SS Allen Bolt -
(4-Nos)

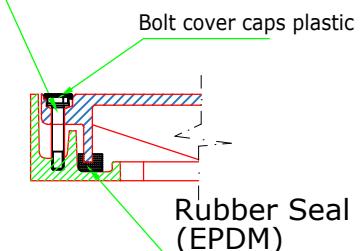


PLAN

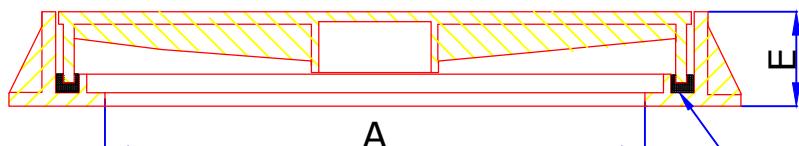

SECTIONAL VIEW OF COVER & FRAME

Sectional View -M Lockable Area



Note :-Anti -Slip Design.

:- Cover seating surface area will be machined if required .

:- Black Bituminous Paint .

RAISED PATTERN DETAILS

RAISED PATTERN THICKNESS 4.0MM

CODE	CLEAR OPENING A (mm)	OVER BASE BXC (mm)	DEPTH E (mm)	LOADING kN	STANDARD
DA-5SW	Ø600	750x750	75	80 kN	AS3996-2019
DATE :	24-06-19	<u>DESCRIPTION :</u> 600 MM DIA CLEAR OPENING DUCTILE IRON LOADING CLASS B 80kN CIRCULAR			
APP.BY:	PC .				
CHECKED BY:	AAB.	SINGLE SEAL COVER & FRAME WITH RUBBER SEAL & BOLTED .			
DRAWN BY :	MC .				
REV :	0				
SCALE :	NTS				
ALL DIMENSIONS ARE IN MM					